

Daily cleaning

SCA Plus / Cold Milk System



See also "Safety instructions" and "Cleaning" in the operating instructions.

CAUTION!
User at risk!



In the beverage dispensing area, there is a danger of scalding due to hot water and steam.
Never reach under the dispensers while dispensing or cleaning.

SCAplus CS



SCAplus Center Milk




SCAplus UC / UM KE



- ▶ Press -button ca. 4 sec.
- ☑ Display: "Cleaning programme / empty gr. container".
- ▶ Pull out the grounds container within 5 sec seconds and clean it.
- ▶ Clean brewing chamber with a brush.
- ▶ Insert the grounds container.

Option: Powder system

- ☑ Display: "Check if mixer is in place".
- ▶ - Press the button.

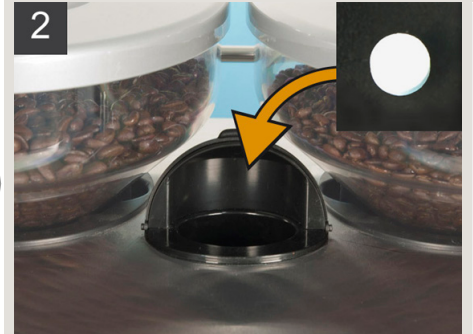

- ☑ "Cleaning programme / insert tablet" appears on the display.
- ▶ Open inlet for ground coffee.

Option 1: With lid monitor

- ▶ Insert cleaning tablets within 15 sec.

Option 2: Without lid monitor

- ▶ Insert cleaning tablet
- ▶ - Press the button.
- ▶ Close the inlet.



Option 1: Without steam; without boiler rinse

- ▶ Continue with step 4.

Option 2: With steam; with boiler rinse

- ☑ Display: "Cleaning programme / hot rinsing".
- ▶ Place a container (ca. 1 l capacity) under the steam wand.
- ▶ - Press the button.
- ☑ Hot rinsing running.



Option 1: Deactivated milk system

- ☑ Cleaning started (see display for duration).
- ▶ Continue with step 6.

Option 2: Activated milk system

- ☑ Display: "Cleaning programme/ cleaning agent".
- ▶ Open cooling unit doors.
- ▶ Remove the milk container.



- ▶ Fill Schaerer cleaning product into the cleaning container. Dosage:
 - Single-chamber cleaning container: 100 ml
 - Two-chamber cleaning container: 100 ml per chamber.
 - Single-chamber cleaning container for Centre Milk: 200 ml
- ▶ Replace cleaning container (1).
- ▶ Place hose / hoses in the container (2).
- ▶ - Press the button.
- ☑ Cleaning is running (see display for duration).




Option 1: "Automatic switching off after cleaning" deactivated

- ☑ Continue with step 7.

Option 2: "Automatic switching off after cleaning" activated

- ☑ The machine switches automatically to "Stand by".
- ▶ Begin operating machine with the - button.

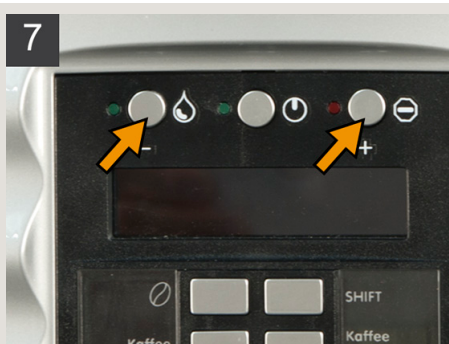

- ☑ Display: "Remove cleaning agent" (only in case of cleaning of milk).

- ▶ Remove and rinse the cleaning container.
- ▶ Clean outside of hose with a damp cloth.
- ▶ - Press the button.

Following use of milk beverages or if the milk system is deactivated:


- ☑ Display: Milk system on / off.

Option 1: Milk system on

- ▶ - Press the button.

Option 2: Milk system off

- ▶ - Press the button.
- ☑ Automatic cleaning complete.

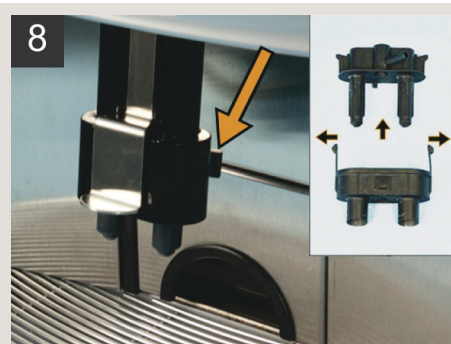

- ▶ Remove foamer head from holder (press lock to the right).
- ▶ Pull off the tubes from the foamer head.
- ▶ Disassemble foamer head and clean under warm, flowing water.
- ▶ Remove residue with a brush.
- ▶ Reassemble and install the foamer head (it will "click" upon engaging in place).
- ▶ Reattach the hose to the foamer head (do not forget the spring).



Option: Machine with steam

- ▶ Wipe the steam wand daily with a moist, clean cloth.
- ▶ Press the steam button briefly ± 5 times to remove milk remains.



- ▶ Clean the drip grid under warm, running water.
- ▶ Clean the drip tray with a moist cloth.
- ▶ Clean the outer surfaces of the machine with a moist cloth.

CAUTION!
User at risk!



Improper handling of beans, water, milk, powder or other coffee ingredients can lead to health problems!
Observe HACCP hygiene regulations!



See also "Safety instructions" - "HACCP hygiene regulations" in the operating instructions.