

Weekly cleaning

Schaerer Coffee Joy



See also "Safety instructions" and "Cleaning" in the operating instructions.


CAUTION!
User at risk!



There is a risk of scalding in the dispensing area of beverages, hot water and steam. During dispensing or cleaning, never reach under the dispensing positions.

Machine cleaning (cleaning programme)

1

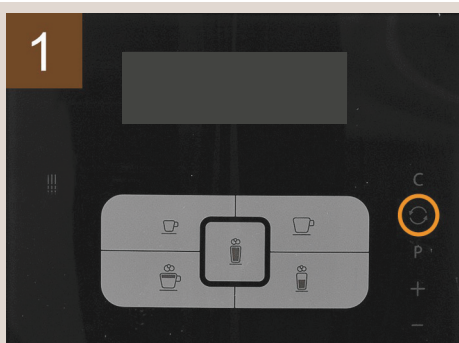


- ▶ Press the button.
 - ☑ The "Maintenance program" menu appears.
- ▶ Leaf through the menu to "Machine cleaning" using and .
- ▶ Confirm by touching .
 - ☑ The cleaning programme starts.

2



- ▶ Empty the drip tray.
- ▶ Fill the drinking water tank.
- ▶ Place a container (min. 3 l) under the beverage outlet.


3

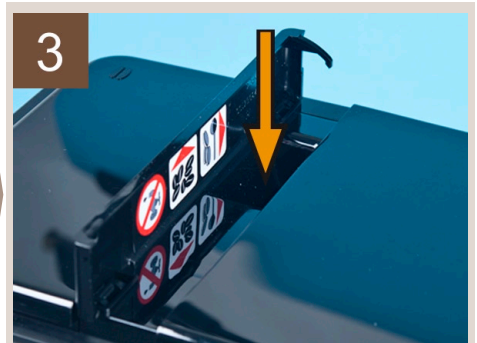

- ▶ Place a cleaning tablet into the inlet (see figure).
- ▶ Close the inlet lid and confirm with .
 - ☑ Cleaning starts.
 - ☑ The remaining cleaning duration appears on the display.

Milk system cleaning (manual)

1

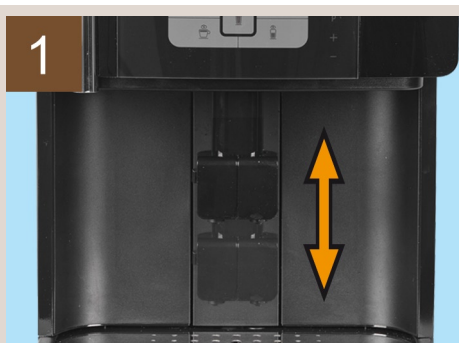

After the machine cleaning programme is finished, the instruction for manual milk system cleaning appears on the display.


- ▶ Slide the beverage outlet to the highest position.
- ▶ Press the release on the back of the beverage outlet and pull the foamer head down and off.

2




- ▶ Remove the grounds container and release the milk hose out of the guide.
- ▶ Take out the steam nozzle located in the beverage outlet at the top.

3

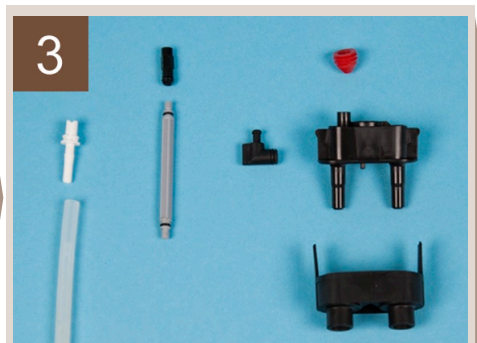

- ▶ Disassemble all parts (see figure).
- ▶ Immerse all parts in a solution of 500 ml of hot water and 25 ml of "Milk-pure" cleaning product for ± 30 min.
- ▶ Wash all parts under luke warm, running water.

4

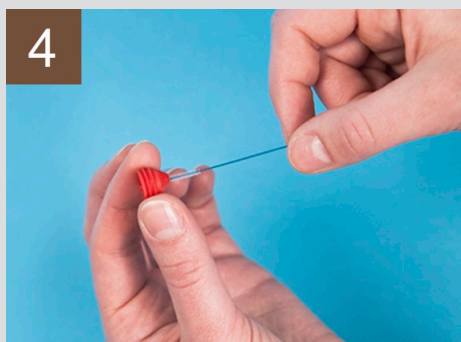

- Clean the outlets of the foamer head and the steam nozzle with a brush.
- Let the parts dry fully.
- Reassemble all parts.
- Insert the steam nozzle in the beverage outlet.
- Attach the foamer head.

5



- Clamp the milk hose into the provided guide.
- Insert the grounds container.

Cleaning the brewing unit (manual)

1



- Remove the lid over the brewing unit.

2



- Pull back the release of the brewing unit.
- Pull the brewing unit out of the machine.

3



- Turn the thread on the head of the brewing unit anticlockwise until the ejector is located in the front position.
- Clean the brewing unit under flowing water.
- Let the brewing unit dry fully before re-installing it in the machine.
- Place the lid on the brewing chamber.

CAUTION!
User at risk!



Improper handling of beans, water, milk, powder or other coffee ingredients can lead to health problems!
Observe all hygiene regulations according to HACCP.



See "Safety instructions" - "HACCP hygiene regulations" in the operating instructions.