

Weekly cleaning

Schaerer Coffee Vito



See also "Safety instructions" and "Cleaning" in the operating instructions.

CAUTION!
User at risk!



It is dangerous to reach into the machine.

Before any manual cleaning, switch off the machine and disconnect it from the mains supply.

CAUTION!
Risk of machine damage!



Carry out weekly cleaning at least once weekly!

The weekly cleaning is additional to the daily cleaning and is not a substitute for it.

Outlet mixing cup (optional)

1



This cleaning is only necessary on machines with an optional "powder system".

- ▶ Switch off the machine with the .
- ▶ Disconnect the power plug.

2




- ▶ Remove the left-hand cover.
- ▶ Pull the hose (that leads from the mixer to the beverage outlet) off the beverage outlet.

3



- ▶ Turn the bayonet fastening handle anticlockwise.
 - ☑ The outlet mixing cup is released from the locking device.
- ▶ Take out the outlet mixing cup complete with hose.
 - ☑ The mixer's impeller is now visible.
- ▶ Clean the impeller with a cloth.

4

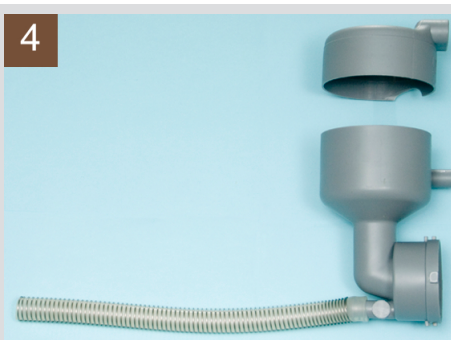


- ▶ Pull off the hose and disassemble the outlet mixing cup.
- ▶ Clean both parts of the outlet mixing cup and the hose under running water.

5



- ▶ Reassemble the outlet mixing cup again. Turn all the openings in the same direction.
- ▶ Insert the outlet mixing cup again in the reverse order.
- ▶ Push the mixer hose complete with the spiral guide back onto the beverage outlet.
- ▶ Reinsert the left-hand cover.


Brewing unit

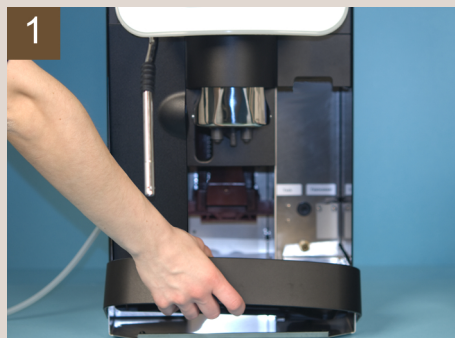


- ▶ Switch off the machine with the button.
- ▶ Disconnect the power plug.
- ▶ Push the beverage outlet to its highest position.
- ▶ Take out the grounds container.
- ▶ Pull out the drip tray.

Option 1: With drinking water tank


- ▶ Take out the drinking water tank.
- ▶ Pull out the drip tray.

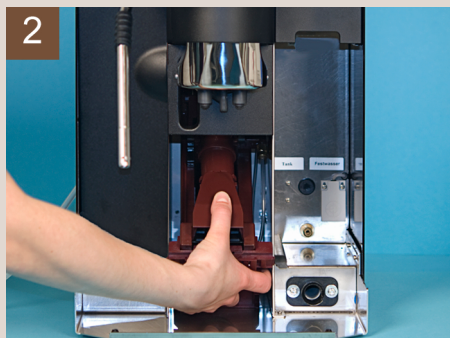


- ▶ Hold the brewing unit from below and pull the slider to the front.
 - ☑ The brewing unit is released.
- ▶ Tip the brewing unit vertically downwards and pull it out to the front.

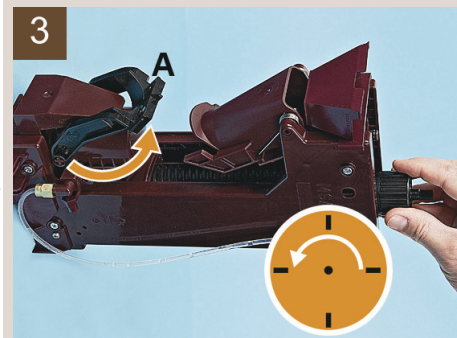

- ▶ Turn the spindle of the brewing unit anticlockwise with the multi-tool until the scraper (A) is in the front ejection position.

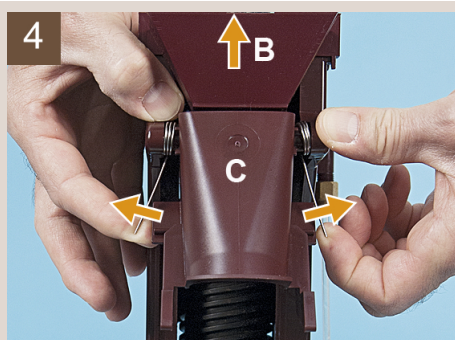

- ▶ Push both springs outwards over the edge, thereby releasing them.
- ▶ Pull out funnel (B) in the direction of the arrow.
- ▶ Hinge the insertion chute (C) upwards out of the way.
- ▶ Remove any ground coffee residue with a dry brush.
- ▶ Clean the brewing unit in warm running water.

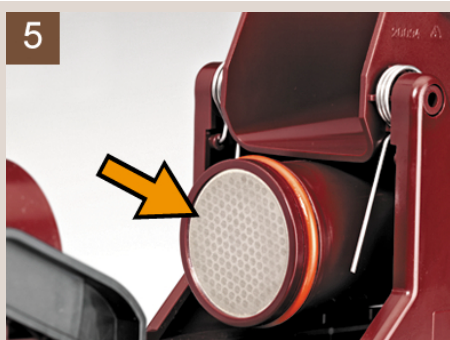

- ▶ Clean the brewing screen in running water.
- ▶ Allow the brewing unit to dry fully.
- ▶ Remove any ground coffee residue from the area of the drip tray pocket.
- ▶ Reinsert the dried brewing unit in the reverse order.
- ▶ It may be necessary to readjust the brewer spindle position a little with the multi-tool.