


Bolero 11 and Bolero 21 OPERATING MANUAL

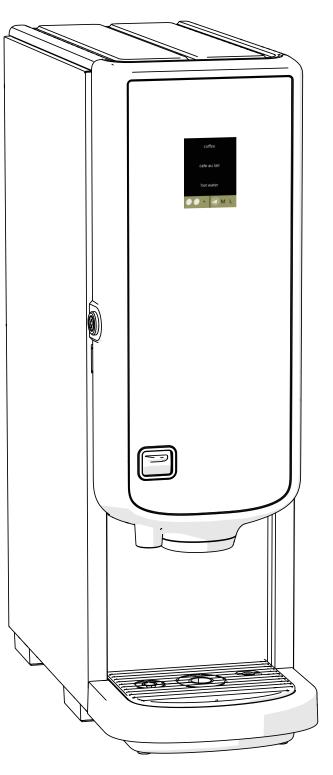

HMI: V2.0

Model-no: • BLR1-010

• BLR2-010



All rights reserved.

No part of this document may be copied and/or published by means of printing, photocopying, microfilming or by any other means whatsoever without the prior written consent of the manufacturer. This also applies to the included drawings and/or diagrams.

The information in this document is based on data that was available at the time the design, the material characteristics and the operating methods were published, meaning that this document is subject to change.

The original instructions for this manual have been written in English. Other language versions of this manual are a translation of the original instructions. For this reason, the instructions are merely a guideline for the installation, maintenance and repair of the machine displayed on the front cover. This document applies to the standard version of this machine.

The manufacturer therefore declines all liability for any damage arising from specifications that deviate from the standard version of the machine delivered to you. This document has been compiled with the utmost care. However, the manufacturer cannot be held liable for any errors it contains or the consequences thereof.



Table of contents

1. P	arts	and functions	.1
1.1	Par	ts	1
1.2	Opt	ional water filter	1
1.3	Cor	ntrols	2
2. S	tart	up	<u>.3</u>
3. Y	our l	beverage	. <u>7</u>
3.1		sonalise your beverage	
3.2	Can	icelling instant related beverages	8
3.3		water tap	
3.4	Scr	eensaver	9
3.5	Ene	ergy saving mode (ECO)	9
4. C		ing	
4.1		ly cleaning	
4.2		ekly cleaning	
5. P		amming menu	
		ntenance menu	
	1.1	Rinse the mixing system	
5.	1.2	Descale	
5.	1.3	Water filter management	<u>26</u>
5.	1.4	Hot-key rinsing function	
5.	1.5	Cleaning management3	
5.	1.6	Descale management	
5.	1.7	Canister calibration	
5.	1.8	Pump calibration 3	8
5.	1.9	Input test	<u>-0</u>
5.	1.10	Output test	13
5.	1.11	Cleaning instructions	<u> 6</u>
5.	1.12	Counters	<u> 9</u>
5.2	Bev	rerages menu	4
5.	2.1	Add beverage to screen5	5
5.	2.2	Change beverage name 5	7
5.	2.3	Change beverage price	9
5.	2.4	Recipe editor	<u>1</u>
5.	2.5	Select ingredient canisters	7
5.	2.6	Change ingredient name <u>6</u>	
5.	2.7	Set default volume	
5.	2.8	Set default strength	<u>'2</u>



5.3 Ma	achine menu	<u>73</u>		
5.3.1	Year	<u>74</u>		
5.3.2	Date	<u>75</u>		
5.3.3	Time	<u>76</u>		
5.3.4	Language	<u>77</u>		
5.3.5	Screensaver management	<u>78</u>		
5.3.6	Background	<u>80</u>		
5.3.7	Display brightness	<u>81</u>		
5.3.8	Sound level feedback	<u>82</u>		
5.3.9	Boiler temperature	<u>83</u>		
5.3.10	Energy-saving mode (ECO)	<u>84</u>		
5.3.11	Security settings	<u>86</u>		
5.3.12	2 Connected devices	<u>91</u>		
5.3.13	Reset to factory settings	<u>93</u>		
5.4 Sof	ftware menu	<u>95</u>		
5.4.1	Machine and software information	<u>96</u>		
5.4.2	Error log	<u>97</u>		
5.4.3	Warning log	<u>98</u>		
5.4.4	Import machine settings	<u>99</u>		
5.4.5	Export machine settings	101		
5.4.6	Update software	103		
5.4.7	Export machine log	105		
5.4.8	Software update history	<u>107</u>		
5.5 On	lline info	108		
6. Mess	ages and errors	<u>109</u>		
	arning messages			
6.2 Err	ors	<u>111</u>		
	endix			
7.1 Filt	er information and water hardness	<u>114</u>		
7.2 Do	or switch functionality	<u>114</u>		
	sic machine configurations			
	N code security settings			
	ecial functions			
7.5.1 Cancel beverage on/off				
7.5.2	Quick rinse			
	•			





1. Parts and functions

1.1 Parts

- 1. descaling cap
- 2. canisters
- 3. canister outlet
- 4. mixing system
- 5. hot water tap
- 6. beverage outlet
- 7. safety key
- 8. USB connection

- 9. programming button
- 10. door-key
- 11. drip tray plate
- 12. drip tray with float
- 13. ventilation system
- 14. water inlet
- 15. electrical connection
- 16. on/off switch

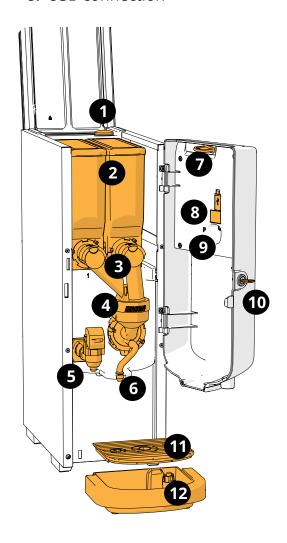

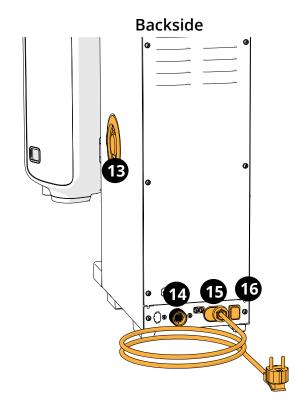

1.2 Optional water filter

To enjoy your beverages even more and improve the performance of your Bolero, we recommend installing a water softener filter. You can request one from Bravilor Bonamat BV.

► When you install a water softener filter you must notify the Bolero of its presence as described in §5.1.3 on p.26.



1.3 Controls

The basic buttons are described underneath.

Overall the Bolero reacts after the release when a button is pressed.

▶ If no button is pressed within 5 minutes, the Bolero returns to the beverage selection screen.


controls	function
< >	navigate between screens
start	start an action
√	confirm (not saved yet)
save	save adjustments
X cancel	cancel
< > ^ ~	browse the available options on a screen
	increase and decrease

- ► All screen shots in this manual are in English.
- ► The beverages, recipes and settings used are only examples.



2. Start up

▶ The Bolero can display different screens, depending on the model of the Bolero.



Initialisation.

wait for the next screen


2a



Machine information.

- after a few seconds the next screen will appear depending the status of the machine:
 - ► First install already completed, the next screen is <u>2k</u>.


2b



First install, select your language:

- press or or to scroll through the available languages
- press **v** to confirm
 - ► The installation menu is only shown when the machine is switched on for the first time or is switched on after the factory settings have been reset, see §5.3.13 on p.93.






Read the safety book!

- press ☐ to go the previous screen
- press
 ✓ to confirm


2d



Set the year:

- press
 or
 to set the current year
- press **v** to confirm

2e



Set the day and month:

- press **■** or **■** to set the current day and month
- press **v** to confirm

2f



Set the time:

- press **■** or **■** to set the current the hour and minutes
- press **v** to confirm






Information screen:

- fill the canisters with ingredients according to the instructions on the screen
- ▶ Only use ingredients that are suitable for vending machines.
- - ► The screen depends on the configuration of the machine, see §7.3 on p.114.
 - ► The values can be changed in the beverage menu, see §5.2.5 on p.67.


2h



Information screen:

- - ► Calibration is essential for a correct dosage of the ingredients and can be done in the maintenance menu, see §5.1.7 on p.35.

2i



Information screen:

- - ► The date, time and language can be changed in §5.3 on p.73.

2j



Information screen - filling boiler.

· wait for the next screen





Information screen - boiler heating:
• wait for the next screen

21



Bolero 21 coffee cafe au lait cappuccino

The machine is ready for use.

2m



3. Your beverage


If you press on name the beverage prepares immediately.

If you want to personalise the drink, select one of the icons in fig. 3.1a, then press the drink of your choice.

3.1 Personalise your beverage

► These settings are used in preparing this one beverage and are not saved.







3.1a



Bolero 11

coffee

(5) M L



Bolero 21

Selecting a beverage:

beverage cup size

beverage strength

Options

Strength:

Beverage size:

touch the beverage of your choice

• press the beans (carousel) to select the

the letters (S=small / M=medium / L=large)

• press the "letters" (carousel) to select the

represents the three steps in volume

3.1b



Preparing a beverage:

please wait

3.1c



3.2 Cancelling instant related beverages

When a beverage is selected, immediately a cancel button appears.

The cancel button

may have a limited dimension but the dosing action can always be stopped wherever the screen is touched.

The cancel function is enabled by default and can only be turned off in §5.3.12 Connected devices on p.91.

When a beverage is cancelled, the mixer continues to run for a few seconds to clean the mixing system.



Cancel a beverage:

• touch anywhere on the screen to cancel the beverage

3.2a



Information screen:

 this screen is displayed to indicate the beverage has been cancelled.

3.2b

3.3 Hot water tap

The Bolero comes in two versions, with and without a manual hot water tap. The separate tap provides hot water for tea or soup.

The hot water tap is intended for filling a cup with plain hot water. Wait a few seconds between drawing off hot water and selecting a new beverage so that the machine can refill itself. The hot water tap is not blocked if the water temperature is too low.

▶ It is not allowed to tap hot water while preparing a drink, in order to prevent clogging of the mixing system.



3.4 Screensaver

If the screen has not been touched for a certain time, the screensaver starts. The screensaver timer can be set in §5.3.5 on p.78.



Screensaver:

 touch anywhere on the screen to return to the beverage selection screen

3.4a

3.5 Energy saving mode (ECO)

The device is equipped with an energy saving mode (ECO) this is used to save energy consumption when the machine is not used (e.g. overnight or during a weekend).

When energy-saving mode becomes active, the following actions are performed:

water level control disabledboiler heating disabled

backlight display set to low percentage.

• fan disabled



The energy control consist out of a (customised) screensaver with a symbol as semi transparent overlay.

The energy-saving mode has priority over the screensaver.

- touch anywhere on the screen to return to the beverage selection screen
- ▶ Depending on the switch-off time, it can take a few minutes before the machine is ready for use again.




4. Cleaning

It is important that the Bolero is kept clean, what can be cleaned:

daily	weekly	
drip tray	canister(s)	
mixing system	ventilation system	
the outside	the inside	

- ▶ Never clean parts of the Bolero in the dishwasher, only if this is explicitly stated.
- ► Do not use any aggressive cleaning agents.
- ► See also the cleaning programmes in §5.1 on p.15.

4.1 Daily cleaning







Drip tray:


- 1. pull the complete drip tray forward
- 2. empty the drip tray
- 3. clean the drip tray (including grid), using *hot* soapy water
- 4. dry everything and place them back in place
- ► Check whether the "red float" is still in place

Mixing system:

- 1. open the door and lid
- 2. close the "yellow" slider of the canister outlets









- 3. turn the fixation ring counter clockwise
- 4. remove the complete mixing system



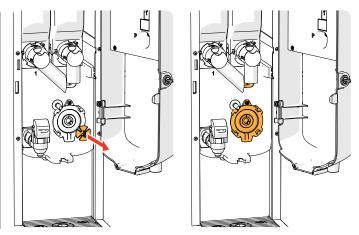


- 5. remove the mixer
- 6. clean the indicated parts, using a damp cloth



- 7. clean the removed parts (not dishwasher proof)
- 8. remount the mixing system in reverse order
- ► Pay attention to the flat sides of the shaft and the mixer.
- reconnect the hose to the mixing system and the outlet
- 10. replace the ingredient canister(s) in the correct position
- 11. open the "yellow" slider of the canister(s)
- 12. close the lid and door




- 1. switch off the machine (due to the touch screen)
- 2. clean the outside with a damp cloth
- 3. switch the machine back on

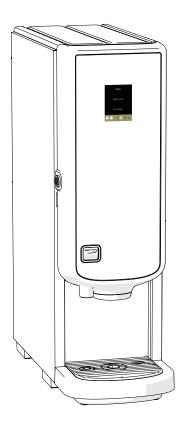

► To prevent clogging of ingredient that has fallen into the mixing system, it is recommended to rinse the machine after the daily cleaning procedure, see §5.1.1 on p.16.



4.2 Weekly cleaning

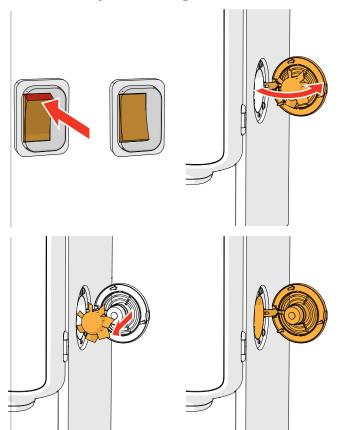


Ventilation system:


- 1. switch off the machine
- 2. open the fan to the back

- 3. carefully pull the rotor of the motor
- 4. clean the fan housing and grid, using a damp cloth



- 5. clean the fan rotor, using hot soapy water6. dry everything and place the rotor back in place
- 7. switch the machine back on






Canister(s):


- 1. open the door and lid
- 2. close the canister outlet by moving the "yellow" slider to the back
- 3. take the canister(s) out of the machine








- 4. pour the ingredients in a dry bowl
- 5. unlink the outlet from the canister













- 7. clean the canister and outlet with a brush
- ► Do **not** use water to prevent the ingredients from clumping and clogging the canister.





- 8. clean the inside of the machine with a *damp* cloth
- 9. refill the canister(s)
- 10. replace the canister(s) in its/their correct position
- 11. open the "yellow" slider of the canister(s) 12. close the lid and door

▶ To prevent clogging of ingredient that has fallen into the mixing system, it is recommended to rinse the machine after the daily cleaning procedure, see §5.1.1 on p.16.




5. Programming menu

to continue place service key or close door To access the programming menu:

- open the door of the Bolero this message appears on the screen
- insert the service key (no. <u>7 on p.1</u>)
- press the programming button (no. 9 on p.1)
- ► All screen shots in this manual are in English.

In the programming menu select one of the available options:

- press ☐ or ☐ to select the next option of the "programming menu"
- press the "text area" to select the next level for that menu
- press
 to exit the programming menu and return to the beverage selection menu.
- If a PIN code is not set, all menu items are available.
 If a PIN code is set, the user can enter the menu with or without a PIN code.
 The menu items secured by PIN codes will be greyed out, see also §7.4 on p.115.
- ▶ If no button is pressed within 5 minutes, the Bolero returns to the beverage selection screen.

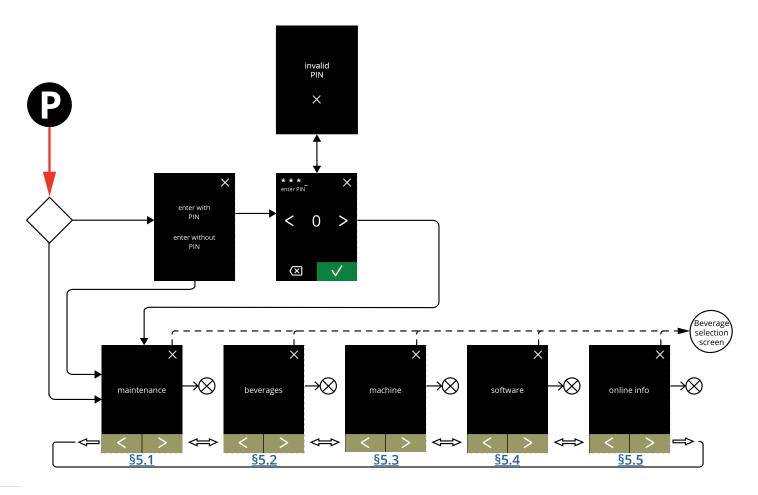



5.1 Maintenance menu

The maintenance menu contains all features that are available regarding the maintenance of the vending machine.


Select one of the available options:

- press

 or

 to choose the next option of the maintenance menu
- press the "text area" to select the next level for that menu
- press

 to go back to chapter 5. Programming menu on p.14.

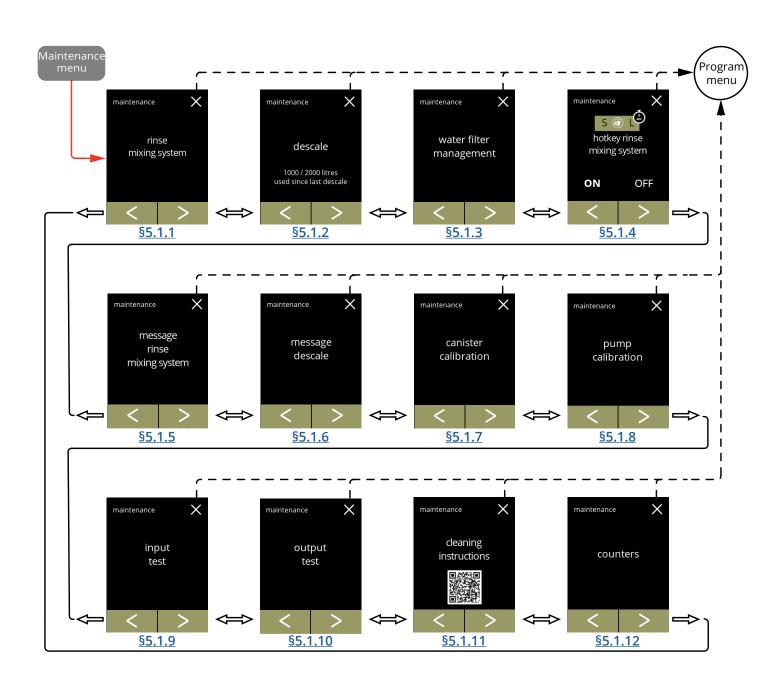



5.1.1 Rinse the mixing system

To maintain the correct functioning of the Bolero, the mixing system must be rinsed several times a day and cleaned daily, see $\S4.1$ on p.10.

This procedure rinses the mixing system and the beverage hose.

Necessities:


container (0,5 litre)



The rinsing procedure:

- press "rinse mixing system" to select
- press **<** or **>** to scroll through the maintenance menu

5.1.1



Information screen:

- make sure all necessities are available
- press

 to go to the next screen

5.1.1a




Information screen:

- place an empty container under the beverage outlet
- press **v** to confirm
- press
 ✓ to go to the previous screen

5.1.1b





Start rinsing:

• press start to begin the rinsing

5.1.1c



Rinsing:

- wait until the process is finished
 - ► Hot water from the outlet
- press cancel to abort

5.1.1d





Information screens:

screen <u>5.1.1</u> is displayed after a few seconds

5.1.1e



5.1.2 Descale

Descaling the Bolero will remove all lime scale within the water system. This will extend the life-cycle of the Bolero.

Necessities:

- descale agent (recommended: "RENEGITE", our proven descaling agent)
- measuring jug (1 litre)
- funnel
- bucket (10 litre)
- average time: ± 40 minutes
- safety gloves and goggles
 - ► The descaling process must not be interrupted after screen <u>5.1.2c!</u>



The descaling procedure:

- press "descale" to select
- press **<** or **>** to scroll through the maintenance menu


5.1.2



Preparation:

- make sure all necessities are available

5.1.2a



Preparation:

- follow the instructions on the screen
- press

 to go to the next screen
- press

 to go to the previous screen

5.1.2b






Information screen:

- average time
- press **v** to confirm and continue the descaling procedure
- press ☐ to go the previous screen
 - ► The descaling process cannot be interrupted after this screen!

5.1.2c



Drain the machine:

- follow the instructions on the screen
- ► Wear protecting gloves, hot water!
- when the water flows out of the hose, the following screen is displayed


5.1.2d



Draining the machine:

- · time indication needed for draining
- when the boiler is empty, the following screen is displayed

5.1.2e



Close the hose:

- follow the instructions on the screen
- press

 to go to the next screen





Prepare the descaling solution:

- follow the instructions on the screen
- ► Wear safety gloves and safety goggles.
- ► The descaling agent must be dissolved completely.
- press

 to go to the next screen

5.1.2g



Preparation:

- follow the instructions on the screen
- press

 to go to the next screen
 - ► Place the bucket also under **all** the outlets (including the hot water outlet).

5.1.2h



Preparation:

- follow the instructions on the screen
- press

 to go to the next screen
- ► Wear safety gloves and safety goggles.
- ► Do not leave the machine unattended while a descaling solution is in the machine.

5.1.2i



Start descaling:

press start to begin the descaling

5.1.2j





Descaling:

- ► Make sure that the bucket is placed under the outlets, in the next step, water with descaling solution will come out of all the outlets (including the hot water outlet).
- press ≥ to go to the next screen


5.1.2k



Descaling:

• the boiler is heating up, wait for the next screen

5.1.21



Descaling:

 when the timer has expired the next screen appears and hot water with descaling solution comes out of the outlets

5.1.2m



Descaling - warning screen:

- wait for the next screen
- ► Hot water with descaling solution will come out of the outlets.





Descaling:

- wait for the next screen
 - » with manual tap, screen <u>5.1.2p</u>
 - » without manual tap, screen <u>5.1.2r</u>
 - ► Hot water with descaling solution flows out of the beverage outlet.

5.1.2o



Descaling - manual tap:

- open the manual tap
- · wait for the next screen
 - ► Wear safety gloves and safety goggles, the water is hot and contains descaling solution!

5.1.2p



Descaling - manual tap:

- close the manual tap
- wait for the next screen

5.1.2q




Descaling - draining:

- follow the instructions on the screen
 - ► Wear safety gloves and safety goggles, the water is hot and contains descaling solution.
- when the water flows out of the hose, the next screen is displayed

5.1.2r






Descaling - draining:

- time indication needed for draining
- when the boiler is empty, the next screen is displayed


5.1.2s



Descaling - draining:

- follow the instructions on the screen
- press **≥** to go to the next screen
 - ► Remove and empty the bucket.

5.1.2t



Descaling - rinse:

- follow the instructions on the screen
- ► Use an empty bucket.
- ► Place the bucket also under **all** the outlets (including the hot water outlet).

5.1.2u



Descaling - rinse:

• the boiler is filling, wait for the next screen

5.1.2v





Descaling - rinse warning screen:

- wait for the next screen
- ► Water will come out of the beverage outlet.

5.1.2w



Descaling - rinsing:

- wait for the next screen
 - » with manual tap, screen <u>5.1.2z</u>
 - » without manual tap, screen <u>5.1.2aa</u>

5.1.2x



Descaling - rinsing manual tap:

- open the manual tap
- wait for the next screen
- ▶ Water will come out of the hot water outlet.

5.1.2y




Descaling - rinsing manual tap:

- close the manual tap
- · wait for the next screen

5.1.2z





Descaling - ending:

- follow the instructions on the screen
- press **v** to confirm every things has been restored

5.1.2aa



Information screen:
• screen <u>5.1.2</u> is displayed after a few seconds

5.1.2ab



Warning screen interrupted descaling process:
• press resume to continue the procedure where it was interrupted and to finish the descaling process

5.1.2ac



5.1.3 Water filter management

If a water filter is installed, replaced or removed must be confirmed in the software so that the counter is updated. A water filter lessens lime-scale deposits and reduces impurities in the water. The Bolero also does not need to be descaled so often, see §7.1 on p.114.

Additionally, it ensures a consistent quality of the hot beverage in both taste and aroma.

water filter settings	default	minimum	maximum
capacity (litre)	OFF	100	10000
months shelf life	UFF	1	24




Install, replace or remove the water filter:

- press "water filter management" to select » water filter already installed go to screen <u>5.1.3c</u>
 - » water filter **not yet** installed, go to the next screen
- press

 or

 to scroll through the maintenance menu


5.1.3



Installing:

- press "install water filter" to select
 - ▶ Read the instructions that come with the filter.

5.1.3a




Confirmation screen:

- install the water filter (conform its instructions)
- press **v** to confirm and go to screen <u>5.1.3f</u>

5.1.3b






Replacing:


- press "replace water filter" to select
- press
 or
 to scroll through the water filter sub-menu
 water filter settings (5.1.3e)
 - » uninstall water filter (5.1.3h)

5.1.3c



Replace the water filter (according to its own instructions).


5.1.3d



Set notification:

- press "water filter settings" to select and go to the next screen
- press **<** or **>** to scroll through the water filter sub-menu
 - » uninstall water filter (<u>5.1.3h</u>)
 - » replace water filter (5.1.3c)

5.1.3e




Set the 'replace water filter' message:

- ► When the water filter is first installed, both values start at 0 and must be changed before save is displayed.
- ► When replacing a water filter, the previous values are set and save is displayed immediately.
- · adjust the settings
- ► Both values are required
- press save to confirm

5.1.3f







Information screens:

 screen <u>5.1.3</u> is displayed after a few seconds

5.1.3g



Permanent removal:

- press "uninstall water filter" to select and go to the next screen
- press
 or
 to scroll through the water filter sub-menu
 » replace water filter (5.1.3c)
 - » water filter settings (5.1.3e)


5.1.3h



Uninstall the water filter:

- physically remove the water filter
- press save to confirm

5.1.3i



Information screen:

• screen <u>5.1.3</u> is displayed after a few seconds

5.1.3j



5.1.4 Hot-key rinsing function

To prevent clogging, it is necessary to rinse the mixing system several times a day. For this purpose, it is possible to set up a so-called hot-key on the screen. In this menu it is possible to put the hot-key rinsing function active or inactive in the beverage selection screen.

Default: OFF

► To use the hot-key rinsing function press and hold for five seconds the S M L button on the beverage selection screen, the rinsing of the mixing system starts immediately.






Availability of hot-key:

- press "ON" to make the hot-key visible
- press **<** or **>** to scroll through the maintenance menu

5.1.4



Setting the hot-key:

- press save to confirm
- ► Save is only active if something has changed.

5.1.4a



5.1.5 Cleaning management

In this menu, it is possible to set a time for a cup counter to display a warning before rinsing the machine.

The warning can always be cancelled without rinsing the machine.

Default: OFF



Cleaning management

- press "message rinse mixing system" to select
- press
 ✓ or
 ✓ to scroll through the maintenance menu

5.1.5



Setting rinse message:

- press 'ON' or 'OFF' to set the message
 - » select OFF and save: go to the next screen
 - » select ON and ▼: next screen is 5.1.5c

5.1.5a




Information screen:

• screen <u>5.1.5</u> is displayed after a few seconds

5.1.5b





Set day or time:

- press
 • or
 • to set the number of cups or days after which the warning should pop-up
- press

 to confirm and go to the next screen
- press

 to go back to screen 5.1.5a

5.1.5c




Message direct or at a later time:

- press "YES" or "NO" to set the message timing
 - » select YES and save:
 - go to the second screen of 5.1.5f
 - » select NO and **☑**:
 - go to the next screen
- press

 to go to the previous screen

5.1.5d



Set the timer:

- press
 or
 or to set the hour and minutes
- press save to confirm and go to the first screen of 5.1.5f
- press

 to go to the previous screen

5.1.5e





Information screens:

screen <u>5.1.5</u> is displayed after a few seconds



5.1.6 Descale management

It is important to know the correct hardness of the water at the location where the Bolero is used (for setting the descaling signal).

If necessary, ask the local water company for the hardness of the water supplied or measure the hardness of the water supplied on site with a water hardness tester (according to the corresponding instructions).

Default: ON (with average water hardness)

See also §7.1 Filter information and water hardness on p.114.



Descale management

- press "descale management" to confirm
- press
 ✓ or
 ✓ to scroll through the maintenance menu

5.1.6



Descale message:

- press "ON" or "OFF" to set the message
 - » select OFF and save:
 go to the next screen
 - » select ON and ▼: go to screen <u>5.1.6c</u>

5.1.6a



Information screen:

• screen <u>5.1.6</u> is displayed after a few seconds

5.1.6b





Water hardness:

- press
 or
 to set the water hardness
 - When a water filter is used, the message can be delayed, select 0-4 °DH.
 - » select a value between 4/8 and 18/30 °DH; press ✓ to confirm and go to screen <u>5.1.6g</u>
 - » select 0/4 °DH; press

 to confirm and go to the next screen

5.1.6c



Volume override:

- press save to confirm and go to screen <u>5.1.6h</u>
- press override to adjust the volume for the notification and go to the next screen
 - ▶ When a water filter is used the volume can be adjusted.


5.1.6d



Increase maximum standard volume:

- press
 or
 to set the volume
- press save to confirm and go to the next screen
- press default to go to the previous screen
 - ► The override volume is shown in orange and can be set from 2100 till 9999 litre.
 - ► If used incorrectly, the descale message can be delayed for too long, allowing lime-scale to build up.

5.1.6e



Information screen:

screen <u>5.1.6</u> is displayed after a few seconds





Standard volumes/water hardness:

• press save to confirm and go to the next screen

5.1.6g



Information screen:
• screen <u>5.1.6</u> is displayed after a few seconds

5.1.6h



5.1.7 Canister calibration

In this menu the canisters can be calibrated.

The calibration determines the quantity of the ingredient when a canister motor runs at a defined speed for a defined time.

When finished the measured weight must be filled in.

Necessities:

- empty cup
- precision scale



Canister calibration procedure:

- press "canister calibration" to confirm
- press **<** or **>** to scroll through the maintenance menu

5.1.7




Make sure all necessities are available.

press

to go to the next screen

5.1.7a



Canister selection:

- ► The number of canisters may vary per configuration, see §7.3 on p.114.
- press **I** or **I** to select a canister (if more than one)
- press **v** to confirm and go to the next screen
- press

 to go to the next screen
- press
 ✓ to go to the previous screen

5.1.7b






Information screen:

- turn the fixation ring counter-clockwise
- remove the mixing system
- put an *empty dry* cup under the canister outlet
- press start to begin the pre-calibration dosing

5.1.7c



Pre-calibration dosing:

- · wait for the next screen
 - ► The canister motor will turn to fill up the outlet.


5.1.7d



Pre-calibration dosing:

- throw the collected ingredient back into the canister
- press
 ✓ to go back to screen 5.1.7c

5.1.7e




Actual calibration:

- put a *empty dry* cup on the precision scale to calibrate
- put the cup under the canister outlet
- press start to begin the dosing
- press
 ✓ to the previous screen

5.1.7f





Dosing:

- wait for the next screen
- ► The canister motor starts and stops several times.

5.1.7g




Weighing the ingredient:

- put the cup with ingredient on the balance
- press **■** or **■** to enter the weight on the screen
- press save to confirm and go to the next screen
- press

 to go back to screen 5.1.7e

5.1.7h




Calibration completed:

- put the mixing system back in place
- press **▼** to confirm

5.1.7i





Information screens:

screen <u>5.1.7</u> is displayed after a few seconds



5.1.8 Pump calibration

In this menu the pump can be calibrated.

With calibration the volume of the water is determined for a defined flow and time. When finished the measured volume must be filled in.

Necessities:


• measuring jug (minimal 200 ml)



Pump calibration procedure:

- press "pump calibration" to confirm
- press ≤ or ≥ to scroll through the maintenance menu


5.1.8



Make sure all necessities are available.

• press **D** to confirm and go to the next screen

5.1.8a



Information screen:

- put a *empty* measuring jug under beverage outlet
- press start to begin the dosing
 - ▶ Please note the machine dispenses hot water.
- press
 Ito go to the previous screen

5.1.8b






Warning screen:

- ► The warning screen is displayed for a few seconds.
- · wait for the next screen


5.1.8c



Hot water dosing in progress:

- wait for the next screen
 - ► Hot water from outlet.


5.1.8d



Determine volume:

- read off the amount of water dosed
- press **■** or **■** to enter the volume on the screen
- press save to confirm and go to the next screen
- press to go back to screen <u>5.1.8b</u>

5.1.8e





Information screens:

screen <u>5.1.8</u> is displayed after a few seconds



5.1.9 Input test

For a proper fault analysis a diagnosis should be made first. An input test can be performed for the following components:

touchscreen


- floater
- door switch / safety key
- low pressure pump
- NTC1 (low position) and NTC2 (high position)
- ▶ Despite the fact that sufficient safety measures are taken working with the systems may entail risks. Our starting point is that people activating this menu are sufficiently skilled and therefore able to properly assess these risks with respect to safety.



Input test

- press "input test" to confirm
- press **≤** or **≥** to scroll through the maintenance menu


5.1.9



Select an input test:

- press test to go to the next screen
- press or or to select another component

5.1.9a



Touch screen:

- touch the areas, they turn green if the button works (touch it again and it turns black again)
- ▶ If not all blocks are tested within 20 seconds, the machine returns to the previous screen. Next time, the previously tested blocks are still green. This screen will not start a full black screen until all blocks are green (OK tested).

5.1.9b






Door switch/safety key:

- remove the service key and replace it resulting in false/true


5.1.9c



Float:

- shows current state on screen (true=wet or false=dry)
- press or or to select another component


5.1.9d



Low pressure pump:

- shows current state of the sensor on screen (true or false)
- press to go to the next screen

5.1.9e




Test the low pressure pump:

- the low pressure pump is turned on for 10 seconds and then stops.
- ► The motor runs slowly, so no water will come out of the outlet.
- press cancel to go back to previous screen

5.1.9f






NTC sensors:

- shows current temperature on screen
- press test to go to the next screen
 press or to select another component

5.1.9g



Test the NTC sensors:

- ► The heating element is on for 10 seconds, so the temperature on the screen should rise.
- press cancel to go back to previous screen

5.1.9h




5.1.10 Output test

For a proper fault analysis a diagnoses should be made first.

The output test gives an overview of all parts able to deliver signals (electrical components). Components that can be tested:

- buzzer
- mixer motor
- heating element
- fan motor

- canister(s)
- low pressure pump
- magnetic inlet valve
- ▶ Despite the fact that sufficient safety measures are taken working with the systems may entail risks. Our starting point is that people activating this menu are sufficiently skilled and therefore able to properly assess these risks with respect to safety.




Output test

- press "output test" to confirm
 - ► There are two options for testing:
 - » pulse: the action is executed as long as the button is pressed.
 - » cycle: the action is executed for 10 seconds and press on cancel to interrupt.
- press

 or

 to scroll through the maintenance menu


5.1.10



Buzzer test:

- press pulse, result: short 'beep'
- press cycle, result: multiple short 'beeps'


5.1.10a



Canister motor test **Bolero 11**:

- remove the canister
- press pulse, result: the canister motor runs briefly at 20% speed
- press cycle, result: the canister motor runs at 20% speed for 10 seconds






Canister motor test **Bolero 21**:

- press test to select a canister in the next screen


5.1.10c



Canister motor test Bolero 21:

- remove the canister(s)
- press pulse, result: the canister motor runs briefly at 20% speed
- press cycle, result: the canister motor runs at 20% speed for 10 seconds


5.1.10d



Mixer motor test:

- press pulse, result: the mixer motor runs briefly at full speed
- press cycle, result: the mixer motor runs at full speed for 10 seconds

5.1.10e




Low pressure pump test:

- press pulse, result: the pump motor runs briefly
- press cycle, result: the pump motor runs for 10 seconds
 - ► The water will not reach the mixing system.

5.1.10f






Heating element test:

- press pulse, result: the heating element turns on for a moment
- press cycle, result: the heating element turns on for 10 seconds

5.1.10g



Magnetic inlet valve test:

- press pulse, result: the valve opens for a moment
- ▶ Do **not** perform the pulse test several times in a row, as this can lead to an overflow of the float tank, for this reason the cycle button is not accessible.

5.1.10h



Fan motor test:

- press pulse, result: the fan motor runs briefly at full speed
- press cycle, result: the fan motor runs at full speed for 10 seconds

5.1.10i




5.1.11 Cleaning instructions

To maintain proper functioning, the Bolero must be cleaned regularly.

daily	weekly
drip tray	canister(s)
mixing system	ventilation system
the outside	the inside

- ► The cleaning instructions are also available as an animation by scanning the QR code in this menu.
- ► See also <u>chapter 4. Cleaning on p.10</u> for a detailed description.



Cleaning instructions:

- press "cleaning instructions" to confirm
- press **<** or **>** to scroll through the maintenance menu
 - ► Scan the QR code for the latest online version of the manual(s).

5.1.11



Daily cleaning instructions:

- press "clean daily" to go to the next screen
 - ► For detailed instruction see §4.1 on p.10.
- press ✓ or ≥ to go to weekly cleaning (<u>5.1.11e</u>)

5.1.11a



Cleaning the drip tray:

- follow the instructions on the screen
- press **<** or **>** to select another daily cleaning instruction

5.1.11b






Cleaning the mixing systems:

- follow the instructions on the screen
- press
 ✓ or
 ✓ to select another daily cleaning instruction


5.1.11c



Cleaning the outside:

- follow the instructions on the screen
- press
 or
 to select another weekly cleaning instruction


5.1.11d



Weekly cleaning instructions:

- press "clean weekly" to go to the next screen
 - ► For detailed instruction see §4.2 on p.12.
- press
 or
 to go to daily cleaning (5.1.11a)

5.1.11e



Cleaning the canisters:

- follow the instructions on the screen
- press
 or
 to select another weekly cleaning instruction






Cleaning the fan:

- follow the instructions on the screen
- press **<** or **>** to select another weekly cleaning instruction

5.1.11g



Cleaning the inside:

- follow the instructions on the screen
- press **<** or **>** to select another weekly cleaning instruction

5.1.11h




5.1.12 Counters

The counters tell you how many beverages have been prepared.

A total counter of all issued beverages is also displayed.


If a drink is removed, the number of that beverage is still counted in the total machine counter.



Counters readings:

- press "counters" to confirm
- press **<** or **>** to scroll through the maintenance menu
 - ► The counters sub-menu consists of the following:
 - » day/total counters
 » reset day counters
 » reset all counters
 » export counters
 » machine counters
 5.1.12a
 5.1.12g
 5.1.12k
 5.1.12o


5.1.12



Day counters:

- press "day/total counters" to confirm
- press **<** or **>** to scroll through the counters sub-menu

5.1.12a



Day counters per beverage and the total of all beverages:

5.1.12b





Reset all day counters:

- press "reset all day counters" to select
- press **≤** or **≥** to scroll through the counters sub-menu

5.1.12c



Start reset:

• press reset day counters to confirm the reset off all day counters

5.1.12d




Confirmation screen:

- press

 to cancel and go to the previous screen

5.1.12e




Information screen

• screen <u>5.1.12c</u> is displayed after a few seconds

5.1.12f





Total counters:

- press "total counters" to select
- press or to scroll through the counters sub-menu


5.1.12g



Start reset:

• press reset all counters to confirm the reset off all day counters

5.1.12h




Confirmation screen:

- press **v** to confirm and continue the reset of all counters
- press

 to cancel and go to the previous screen

5.1.12i



Information screen

• screen <u>5.1.12g</u> is displayed after a few seconds





Export counters:

- place a USB stick
 - ▶ If there is no USB stick in the machine this option is greyed out.
- press "export counters" to confirm
- press **<** or **>** to scroll through the counters sub-menu

5.1.12k



Start export counters:

• press start to begin the export

5.1.121



Progress screen

- wait until the process is finished
- press on cancel to interrupt

5.1.12m






Information screens:

screen <u>5.1.12k</u> is displayed after a few seconds






Machine total counter:

- press "machine counter" to select
 press
 or
 to scroll through the counters sub-menu

5.1.12o



Information screen:

• screen <u>5.1.120</u> is displayed after a few seconds

5.1.12p



5.2 Beverages menu


The beverage menu contains all functions to adjust your beverages to your wishes. Select one of the available options

- press

 or

 to select the next option of the "beverage menu"
- press the "text area" to select the next level for that menu
- press

 to go back to chapter 5. Programming menu on p.14.
 - ► The beverages, recipes and settings used are only examples.

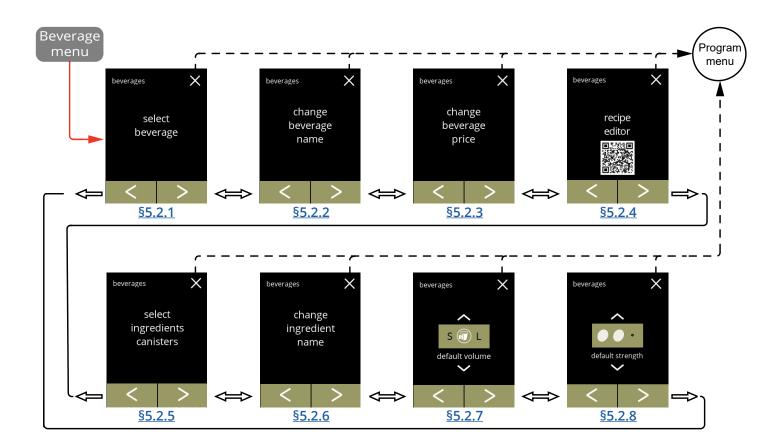



5.2.1 Add beverage to screen

In this menu the available beverages (recipes) can be selected and linked to a beverage position.

It is possible to replace a beverage, the beverages cannot be dragged to another place. The open spaces where another beverage can be placed are marked with 3 dots.



Place a beverage in the beverage selection screen:

- press "select beverage" to confirm

5.2.1



Bolero 21



Available beverages in the beverage selection screen:

- press on a beverage to replace or a free place (marked as 3 dots) to add a beverage
- press exit to accept the current configuration and go to the previous screen

5.2.1a



Replace or delete a beverage on the screen

- ▶ Delete is active as long as the beverage names are the same.
- ► Removing a beverage is not an option with the Bolero 11, as at least one drink must be available.
- press delete to remove the beverage (three dots now replace the beverage) or
- press save to replace the beverage

5.2.1b





Information screens:

• screen <u>5.2.1</u> is displayed after a few seconds

5.2.1c



5.2.2 Change beverage name

In this menu the name of the beverage can be changed to a custom defined beverage name.



Change beverage name:

- press "change beverage name" to confirm
- press

 or
 to scroll through the beverage menu

5.2.2



Available beverages in the beverage selection screen:

- press on a beverage to change the name
- press exit to accept the current configuration and go to the previous screen

5.2.2a



Enter the new custom beverage name:

- press the character between the
 ■ to form the new beverage name
 - » press ABC for capitals
 - » press à..ç..ê for special characters
 - » press 123#* for numbers
 - » press **f**or a space
 - » press to remove a previous input

5.2.2b





Information screens:

screen <u>5.2.2</u> is displayed after a few seconds

5.2.2c




5.2.3 Change beverage price

In this menu the price per beverage can be set or modified.

Prices can be a token or a currency.

Price can be set per cup type (cup, mug, decanter).

- ► Coins to be used are specified in §5.3.12 Connected devices on p.91.
- ▶ The currency symbol and the currency separator are determined by the external payment system



Change beverage price:

- press "change beverage price" to confirm
 - » Bolero 11: go to <u>5.2.3b</u>
 - » Bolero 21: go to <u>5.2.3a</u>

5.2.3



Bolero 21



Select a beverage:

- press on the beverage to change the prices
- press exit to accept the current beverage prices and go to the previous screen

5.2.3a



Adjust the 'volume small' price:

- press
 □ or
 □ to change beverage volume price
- press

 and go to the next screen

5.2.3b





Adjust the 'volume medium' price:

- press
 ☐ or ☐ to change beverage volume price

5.2.3c




Adjust the 'volume large' price:

- press or to change beverage volume price
- press save to accept all and go to the next screen

5.2.3d





Information screens:

screen <u>5.2.3a</u> is displayed after a few seconds

5.2.3e





Example screen tokens



5.2.3f



5.2.4 Recipe editor

The following setting of the beverage recipes can be changed:

- volume
- strength
- mixer speed
- ▶ Only use ingredients that are suitable for vending machines and use the recommended dosage as indicated on the packaging.
- ▶ With the **recipe editor** a standard recipe can be changed (new recipes cannot be added).
- ► A changed recipe can be reset to the default values via the recipe test, see <u>5.2.4t on p.66.</u>
- ► The machine is unable to provide feedback (error) when the mixer motor is not running and when the canister motor is set to a very low speed.



Change the recipe of a beverage:

- press "recipe editor" to confirm
- press

 or

 to scroll through the beverage menu


5.2.4



Recipe selection:

- press ≥ to confirm

5.2.4a



Volume (S):

- press
 or
 to select another volume
- press **■** or **■** to change the volume for the different cup sizes
- ► Volume can be set from 0-30ml to 1000ml (recipe dependent)
- press

 to confirm and go to the next screen

5.2.4b





Volume (M):

- press
 ✓ or
 ✓ to select another volume
- press or to change the volume for the different cup sizes
 - ► Volume can be set from 0-30ml to 1000ml (recipe dependent)

5.2.4c



Volume (L):

- press
 ✓ or
 ✓ to select another volume
- press or to change the volume for the different cup sizes
 - ► Volume can be set from 0-30ml to 1000ml (recipe dependent)
- - » go for a beverage with 1 ingredient to the next screen
 - » go for a beverage with 2 ingredients to screen <u>5.2.4h</u>

5.2.4d



One ingredient beverage

Strength:

- ► Use the † to switch between ratio and gr/ml
- press **■** or **■** to change the ratio ingredient/water
- press **v** to confirm

5.2.4e



One ingredient beverage

Mixer speed:

- press
 ■ or
 ■ to change mixer speed
- press
 ▼ to confirm

5.2.4f






One ingredient beverage

Confirmation screen:

- ► A summary of the new ingredient settings is displayed.
- press
 ✓ to go to the previous screen
- press save to confirm and go to <u>5.2.4m</u>

5.2.4g




Two ingredients beverages

Strength, first ingredient:

- ▶ Use the †↓ to switch between ratio and gram/120 ml
- press
 ■ or
 ■ to change the ratio ingredient/water

5.2.4h



Two ingredients beverages

Mixer speed, first ingredient:

- press
 ■ or
 ■ to change the ratio ingredient/water
- press
 ✓ to confirm

5.2.4i



Two ingredients beverages

Strength, second ingredient:

- ► Use the † to switch between ratio and gram/120 ml
- press **■** or **■** to change the ratio ingredient/water
- press
 ✓ to confirm





Two ingredients beverages

Mixer speed, second ingredient:

- press **■** or **■** to change the ratio ingredient/water
- press **v** to confirm

5.2.4k



Two ingredients beverages

Confirmation screen:

- ► A summary of the new ingredient settings is displayed.
- press ☐ to go to the previous screen
- press save to confirm and go to the next screen

5.2.41



Information screen:

• screen <u>5.2.40</u> is displayed after a few seconds

5.2.4m



Information screen:

• screen <u>5.2.4a</u> is displayed after a few seconds

5.2.4n





Test recipe:

- press , screen <u>5.2.4</u> is displayed
- press yes, to go to the next screen


5.2.40



Test volume:

- press or or to select a beverage volumes
- press
 to go to the previous screen

5.2.4p



Information screen:

- place an empty container under the beverage outlet
- press **v** to begin the dosing
- press ☐ to go to the previous screen

5.2.4q



Preparing a beverage:

• please wait for the next screen

5.2.4r





Testing:

- check the volume and the strength/taste
- recipe not ok, press no, go to the next screen
- recipe **ok**, press yes, screen <u>5.2.4v</u> is displayed

5.2.4s



Recipe not satisfactory:

- press back to default recipe to undo the modifications and go to the next screen
- press $\frac{\text{edit recipe again}}{\text{displayed}}$, screen $\frac{5.2.4b \text{ on p.61}}{\text{displayed}}$ is displayed


5.2.4t



Back to default recipe:

 please wait, screen <u>5.2.4a on p.61</u> is displayed after a few seconds

5.2.4u



Test another volume:

- press yes go to screen <u>5.2.4p</u>
- press m, screen 5.2.4 is displayed


5.2.4v



5.2.5 Select ingredient canisters

Default *instant* ingredients will be available in the machine:

- regular coffee
- espresso coffee
- topping (only Bolero 21)
- cacao
- premix
 - ▶ Only use ingredients that are suitable for vending machines.
 - ▶ Names of ingredients can be changed in §5.2.6 on p.69.



Select an ingredient per canister:

- press "select ingredient canister" to confirm
 - » Bolero 11 go to next screen
 - » Bolero 21 go to <u>5.2.5b</u>
- press **I** or **D** to scroll through the beverage menu

5.2.5



Bolero 11

Select an ingredient

- press or or to scroll through the available ingredients
- press save to confirm and go to the previous screen
 - ► Save is only active if something has changed.

5.2.5a



Bolero 21 canister 1

Select a ingredient:

- press on an ingredient to select and go to the next screen
 - ► Confirm **I** is only active if something has changed.

5.2.5b





Bolero 21 canister 2

Select a ingredient:

- press
 ✓ to select the previous screen
- press

 to select the next screen
- press or or to scroll through the available ingredients
- press on an ingredient to select and go to the next screen
 - ► Confirm **I** is only active if something has changed.

5.2.5c



Bolero 21

Control screen:

- ► This screen appears when **v** or **v** is pressed after the last canister.
- press
 ✓ to select the previous screen
- press save to confirm

5.2.5d



Information screen:

► Only if a new ingredient is different to the original one go to §5.2.1 Add beverage to screen on p.55.

The beverages made with the previous ingredient are set to inactive and their names have been replaced by the 3 dots. That's why you have to combine new beverages with the buttons. When this action is completed, the machine will be operational again with the new ingredients.

5.2.5e



5.2.6 Change ingredient name

In this menu the name of the ingredient can be changed to a custom defined ingredient name.



Change ingredient name:

- press "change ingredient name" to confirm
 - » Bolero 11 go to the next screen
 - » Bolero 21 go to screen <u>5.2.6b</u>
- press

 or

 to scroll through the beverage menu

5.2.6



Ingredient canister:

press on the ingredient and go to screen <u>5.2.6c</u>

5.2.6a



Available ingredient canisters:

- press **<** or **≥** to go to an ingredient canister
- press on the ingredient and go to the next screen

5.2.6b





Enter the new custom ingredient name:

- press

 or
 to scroll through the alphabet
- - » press ABC for capitals
 - » press a..ç..e for special characters
 - » press 123#* for numbers
 - » press for a space
 - » press 🖾 to remove a previous input
- press **v** to confirm the new ingredient name

5.2.6c





Information screens:

screen <u>5.2.6</u> is displayed after a few seconds

5.2.6d



5.2.7 Set default volume

In this menu, the standard volume of the beverage selection screen can be set. This default setting applies to all beverages in the beverage selection screen. The amount of ml per beverage can be adjusted in the recipe menu §5.2.4 on p.61.



Change the default volume:

- press or or to set the default volume
- press **<** or **>** to scroll through the beverage menu

5.2.7



Confirm changes:


- press save to confirm
- ► Save is only active if something has changed.

5.2.7a



5.2.8 Set default strength

In this menu, the standard strength of the beverage selection screen can be set. This default setting applies to all beverages in the beverage selection screen.





Change the default strength:

- press or or to set the default strength
- press **I** or **I** to scroll through the beverage menu

5.2.8



Confirm changes:

- press save to confirm
 - ► Save is only active if something has changed.

5.2.8a




5.3 Machine menu

You can programme the machine settings in the this menu. Select one of the available options:

- press
 ✓ or
 ✓ to select the next option of the "machine menu"
- press the "text area" to select the next level for that menu
- press

 to go back to chapter 5. Programming menu on p.14

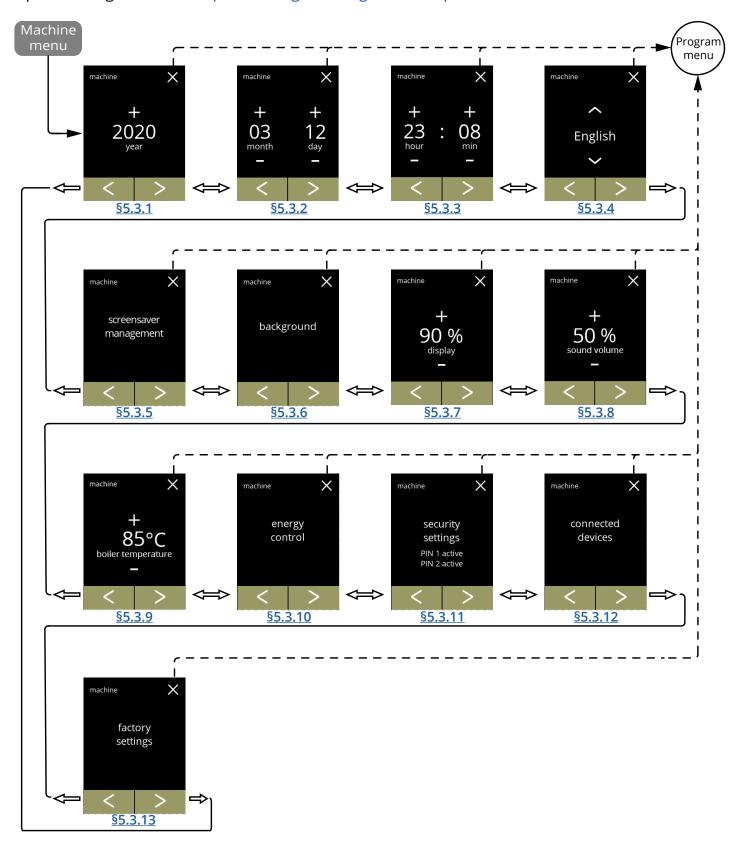



5.3.1 Year

Adjust the year.



Change the date:

- press
 ☐ or ☐ to set the year
 press ☐ or ☐ to scroll through the machine menu

5.3.1



Confirm changes: • press save to confirm

- ► Save is only active if something has changed.

5.3.1a



5.3.2 Date


Adjust the day and month.



Change the month and day:

- press **■** or **■** to set the current the month and day
- press **I** or **I** to scroll through the machine menu

5.3.2



- Confirm changes:
 press save to confirm
- ► Save is only active if something has changed.

5.3.2a



5.3.3 Time

Adjust the time.



Change the time:

- press
 • or
 • to set the current the hour and minutes
 press
 • or
 • to scroll through the machine menu

5.3.3



Confirm changes: • press save to confirm

- ► Save is only active if something has changed.

5.3.3a



5.3.4 Language

The available languages are:

- English
- Spanish
- French
- Italian
- Dutch
- Norwegian

- Polish
- Portuguese
- Swedish
- Danish
- German

Default: English



Change the language:

- press or or to scroll through the available languages
- press the language to set as the current language
- press **<** or **≥** to scroll through the machine menu

5.3.4



Confirm of change:

- press save to confirm
- ► Save is only active if something has changed.

5.3.4a



5.3.5 Screensaver management


In this menu, you can set when the screen saver becomes active.

setting	screensaver
default	15 min.
minimum	1 min.
maximum	90 min.

The screensaver can be set to a custom defined screensaver.

You can always return to the default screensaver.


▶ The screensaver image does not need for a transparent background.



Change the screensaver:

- press "screensaver" to confirm
- press **☑** or **▷** to scroll through the machine menu


5.3.5



Activate/deactivate the screensaver option:

- press "ON" or "OFF" to set the screensaver:
 - » select OFF and save: go to the next screen
 - » select ON and **▼**: go to screen <u>5.3.5c</u>
 - ► Save is only active if something has changed.

5.3.5a



Information screen:

• screen <u>5.3.5</u> is displayed after a few seconds

5.3.5b






Set the time when the screensaver becomes active

- press
 or
 to select the activation time
- press

 to confirm


5.3.5c



Change the screensaver image:

- press ≥ to go to the next screen
- place a USB stick
 - ▶ If there is no USB stick in the machine this option is greyed out.
- press save to go to the next screen

5.3.5d



Information screen:

screen <u>5.3.5</u> is displayed after a few seconds

5.3.5e



5.3.6 Background

In this menu the background of the beverage selection screen can be set. The background can be set to a custom defined background, see specifications. The default background remains available in the GUI, so you can always return to the default background.

▶ We recommend **not** to use a light colour or white because of the readability.



Change the background:

- press "background" to confirm
- press
 ✓ or
 to scroll through the machine menu

5.3.6



Change the background image:

- press

 to go to the next screen
- place a USB stick
 - ▶ If there is no USB stick in the machine this option is greyed out.
- press
 or
 to select a custom image
- press save to go to the next screen
 - ► Save is only active if something has changed.

5.3.6a



Information screen:

• screen <u>5.3.6</u> is displayed after a few seconds


5.3.6b



5.3.7 Display brightness

The brightness of the display can be increased or decreased in steps of 5%.

setting	brightness
default	90%
minimum	20%
maximum	100%



Change the display brightness:

- press
 ☐ or ☐ to select the brightness
 press ☐ or ☐ to scroll through the machine menu

5.3.7



Confirmation of change:
• press save to confirm

- ► Save is only active if something has changed.


5.3.7a



5.3.8 Sound level feedback

The sound level of the feedback can be increased or decreased.

setting	sound level	
default	50%	
minimum	0% (OFF)	
maximum	100%	



Sound level feedback:

- press

 or

 to set the sound level
 - ► When the audio volume is increased or decreased, a beep is generated in that volume for verification.
- press **<** or **>** to scroll through the machine menu

5.3.8



Confirmation of change:

- press save to confirm
 - ► Save is only active if something has changed.

5.3.8a



5.3.9 Boiler temperature

The temperature is set with an absolute temperature setting in degrees Celsius

setting	temperature
default	85°C
minimum	80°C
maximum	90°C



Change the boiler temperature:

- press
 ☐ or ☐ to set the temperature
 press ☐ or ☐ to scroll through the machine menu

5.3.9



Confirmation of change:
• press save to confirm

- ► Save is only active if something has changed.

5.3.9a



5.3.10 Energy-saving mode (ECO)

After the set time, the Bolero will automatically go into sleep mode. The system becomes active when the screen is touched.

The time of the energy-saving mode can be set as defined in the table below.

1	2	3	4	5	6
Off	15 min.	30 min.	1 hour	2 hours	4 hours

Default: 2 hours

When energy-saving mode becomes active, the following actions are performed:

boiler heating disabled

• backlight display set to low percentage.

• fan disabled

► Energy control mode is dominant over screensaver mode



Change the energy-saving mode:

- press "eco modus" to confirm
- press **<** or **≥** to scroll through the machine menu

5.3.10



Activate/deactivate the energy-saving mode option:


- press "ON" or "OFF" to set energy-saving mode
 - » select OFF and save or ≥:

go to the next screen

- » select ON and save:
- go to screen <u>5.3.10c</u>
- ► Save is only active if something has changed.

5.3.10a






Information screen:

• screen <u>5.3.10</u> is displayed after a few seconds


5.3.10b



Set the time when the eco modus becomes active:

- press **■** or **■** to select the activation time
- press save to confirm and go to the next screen
- press
 to go back to screen 5.3.10a

5.3.10c



Information screen:

• screen <u>5.3.10</u> is displayed after a few seconds

5.3.10d



5.3.11 Security settings

In this menu the PIN code settings can be defined.

There are 2 PIN code:

- PIN 1 (general safeguard)
- PIN 2 (specific safeguard)

§7.2 on p.114 describes which PIN codes protect which options.

If a PIN code is entered to access the menu, it remains valid until the user leaves the menu again.



Change the security settings:

- press "security settings" to confirm
- press **I** or **D** to scroll through the machine menu
 - ▶ If a PIN code is active, it is indicated on this screen.

5.3.11



Change the security settings:

- press "PIN 1 for total access":
 - » PIN 1 already set: go to screen <u>5.3.11f</u>
 - » PIN 1 not yet set: go to the next screen
- press
 or
 to go to screen
 <u>5.3.11q</u> for PIN 2

5.3.11a



Set PIN code:

press "Set PIN" and go to the next screen

5.3.11b





Enter the PIN code:

- press on the number to select
- press 🖾 to delete a PIN number, see left corner
- press ▶ when the 4 digit PIN code is entered
 - ► When four numbers are entered the next screen is displayed to verify the PIN code.

5.3.11c



Verify the PIN code:

- press on the number to select
- press 🖾 to delete a PIN number, see left corner
- press **v** to verify the PIN code entered and go to the next screen
 - ► When the PIN code does **not** match, you will receive another attempt to enter the correct code.

5.3.11d



Information screen:

• screen <u>5.3.11a</u> is displayed after a few seconds

5.3.11e



Change PIN 1:

- press "change PIN 1" to confirm and go to the next screen
- press
 or
 to go to screen
 <u>5.3.11m</u>





Enter the PIN code:

- press on the number to select
- press

 to verify the PIN code entered and go to the next screen
 - ► When the PIN code does **not** match, you will receive another attempt to enter the correct code.

5.3.11g



Information screen:

• the next screen is displayed after a few seconds

5.3.11h



Enter the new PIN code:

- press **I** or **I** to scroll through the numbers
- press on the number to select
- press to delete a PIN number, see left corner
- press ≥ when the 4 digit PIN code is entered
 - ► When four numbers are entered the next screen is displayed to verify the PIN code.

5.3.11i



Verify the new PIN code:

- press on the number to select
- press to delete a PIN number, see left corner
- press

 to verify the PIN code entered and go to the next screen
 - ► When the PIN code does **not** match, you will receive another attempt to enter the correct code.

5.3.11j






Information screen:

• screen <u>5.3.11a</u> is displayed after a few seconds

5.3.11k



Delete PIN 1:

- press "delete PIN 1" to confirm and go to the next screen
- press ✓ or ≥ to go to screen <u>5.3.11f</u>


5.3.11



Enter the PIN code:

- press on the number to select
- press 🖾 to delete a PIN number, see left corner
- press v to verify the PIN code entered and go to the next screen
 - ► When the PIN code does **not** match, you will receive another attempt to enter the correct code.

5.3.11m




Information screen:

• the next screen is displayed after a few seconds

5.3.11n





Confirmation screen:

- press

 to confirm and go to the next screen

5.3.110



Information screen:

• screen <u>5.3.11a</u> is displayed after seconds

5.3.11p



Change the security settings:

- press "PIN 2 for limited access" to select:
 - ► the screens that follow are the same as PIN 1 (only PIN 1 is replaced by PIN 2 in the screens <u>5.3.11b</u> to <u>5.3.11p</u>)
- press **<** or **≥** to go to screen <u>5.3.11a</u> for PIN 1

5.3.11q



5.3.12 Connected devices

In this menu settings of external devices connected to the machine can be set or modified. In case of a connected payment module, the possibility to cancel a beverage can be disabled. Devices that can be connected:


payment devices (with and without coins)



Select or configure the connected devices:

- press "connected devices" to confirm
- - ► If no external device is connected to the machine, the text on this screen will remain greyed out.


5.3.12



Payment device:

- ► The checkbox gives the possibility to decide whether a paid beverage could be cancelled or not (the money is not returned).
- press "payment devices" to confirm

5.3.12a



Select/configure the payment device:

- press "select coins" to confirm
- press **≤** or **≥** to scroll for more connected payment devices
 - ► The availability of the navigation buttons depends on the number of connected devices.
- ▶ *Up to 2 payment devices can be connected.*

5.3.12b







Select which coins can be used:

- press or o to scroll through the available coins
- fill in the checkbox to select the coin
- press save to confirm and go to the next screen
 - ► Save is only active if something has changed.

5.3.12c





Information screens:
• screen <u>5.3.12b</u> is displayed after a few seconds

5.3.12d



5.3.13 Reset to factory settings

A factory reset reverts the machine to how it was manufactured.

Exceptions are:

- firmware
- machine counter (only the day and beverage counters are reset)
- descale counter
- water filter
- firmware history



Reset to factory settings:

- press "factory settings" to confirm
- press ✓ or ≥ to scroll through the machine menu

5.3.13



Confirmation screen:

- ► First save the customized data, see §5.4.5 Export machine settings on p.101.
- press **v** to confirm

5.3.13a



Progress screen

wait until the process is finished

5.3.13b





Information screen:

• the next screen is displayed after a few seconds

5.3.13c

the machine needs to reboot please wait...

Information screen:
• the machine starts automatically (this takes a while)

5.3.13d




5.4 Software menu

All firmware related items can be read, set or changed in the software menu. Select one of the available options:

- press ≤ or ≥ to select the next option of the "software menu"
- press the "text area" to select the next level for that menu
- press

 to go back to chapter 5. Programming menu on p.14

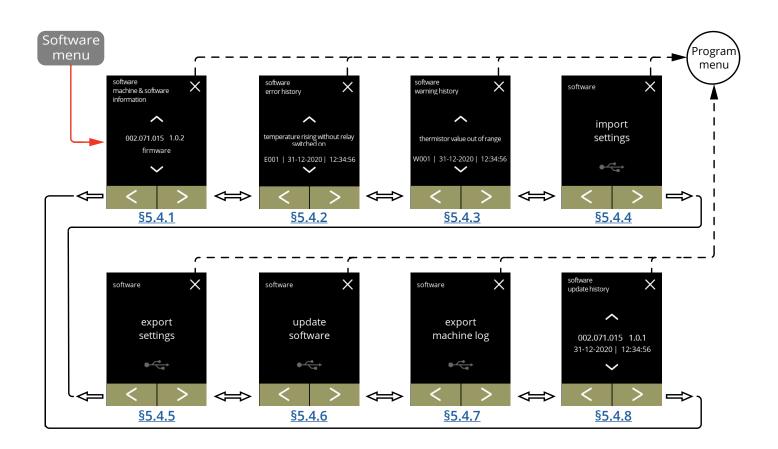



5.4.1 Machine and software information

This menu shows information that identifies the machine.

software		hardware (version,	other		
HMI (version)	I/O (version)	external (version, article number)	article number)		
• bootloader	• bootloader	• Interface board (if present)	HMI board	• IP information (IP address, Mac address, Gateway and DNS) (if connected)	
• application » API » GUI	application	• other devices (if present)	• I/O board	• serial number machine	
• touchscreen controller			• interface print (if present)		
 Bluetooth/ Wi-Fi 			other devices (if present)		



Information screens:

- press or or to retrieve the other machine & software information
- press **☑** or **▷** to scroll through the software menu

5.4.1



5.4.2 Error log

In this menu the error history is shown.

The following items are displayed:

- error code
- error message
- date and time

The error log can contain up to 50 error messages, the last error code generated is displayed first

► An overview of the error messages can be found in §6.2 on p.111.



Information screens:

- press or oretrieve the error history
- press **<** or **>** to scroll through the software menu
- ► The last error code generated is shown first.

5.4.2



5.4.3 Warning log

In this menu the warning history is shown.

The following items are displayed:

- warning code
- warning message
- date and time

The warning log can contain up to 50 warning messages, the last warning code generated is displayed first.

► An overview of the warning messages can be found in §6.1 on p.109.



Information screens:

- press or or to retrieve the warning history
- press **☑** or **▷** to scroll through the software menu
 - ► The last warning code generated is shown first.

5.4.3



5.4.4 Import machine settings

In this menu the settings of another machine (or from the Bravilor factory) can be imported. With settings the following is meant:


- recipes
- machine configuration
- security levels
 - ▶ Only if the identities of both machines are the same the settings can be transferred.



Import machine settings:

- place a USB stick
 - ▶ If there is no USB stick in the machine this option is greyed out.
- press "import settings" to confirm
- press **I** or **I** to scroll through the software menu

5.4.4



Import the settings on the machine:


- press
 or
 to select a setting file
- press start to begin the import
 - ▶ It is only possible to import a file with the same identification:

EXP21 : identical model

2149 : identical boiler wattage 0 : presence manual tap (0/1) 20220108 : date is variable (yyyymmdd)

bbp : identical file extension

5.4.4a



Confirmation screen:


- ▶ Be aware that your current settings will be overwritten.
- press
 ✓ to go to the previous screen






Progress screen
• wait until the process is finished

5.4.4c





information screen:

• screen <u>5.4.4</u> is displayed after a few seconds


5.4.4d



5.4.5 Export machine settings

In this menu the machine settings are exported to a file. With settings the following is meant:


- recipes
- machine configuration
- security levels
- identity (used to check if the new machine has the same identity)
 - ► Keep in mind that the security levels of the machine are also copied.



Export machine settings:

- place a USB stick
 - ► If there is no USB stick in the machine the export button is greyed out.
- press "export settings" to confirm
- press **<** or **>** to scroll through the software menu

5.4.5



Export the settings of the current machine:

- press start to begin the export
- ▶ The name of the export file is structured as follows:

EXP21 : model

2149 : boiler wattage

0 : presence manual tap (0/1) 20220108 : date is variable (yyyymmdd)

bbp : file extension

5.4.5a



Progress screen

- wait for the process to finish
- press on cancel to interrupt







Information screens:

• screen <u>5.4.5</u> is displayed after a few seconds

5.4.5c



5.4.6 Update software

In this menu the software can be updated.

The software (package) can be selected from the USB stick and after selection the package information will be shown.


▶ The software can only be updated, a downgrade is not possible.



Update the machine software:

- place a USB stick
- ▶ If there is no USB stick in the machine this option is greyed out.
- press "update software" to confirm
- press **I** or **I** to scroll through the software menu


5.4.6



Select the file to update the software:

- press
 or
 to select a file
- press start to begin the update

5.4.6a



Confirmation screen:

- ▶ Be aware that your current firmware will be overwritten.
- press **v** to confirm
- press
 ✓ to go to the previous screen

5.4.6b






Progress screen

- wait until the process is finished
- press on cancel to interrupt
 - ► If the file cannot be imported (earlier version or wrong format) the screen is aborted and screen <u>5.4.6f</u> appears.

5.4.6c



Information screen:

• the next screen is displayed after a few seconds

5.4.6d



Information screen:

- the machine starts automatically (this takes a while)
- the next screen is displayed automatically

5.4.6e



Information screen:

 the beverage selection screen is displayed when the software is installed

5.4.6f



5.4.7 Export machine log

In this menu the machine log is exported to a file.


The report consists of dispense counters (free and paid), warning and error messages.



Export machine log:

- place a USB stick
- ▶ If there is no USB stick in the machine this option is greyed out.
- press "export machine log" to confirm
- press **<** or **>** to scroll through the software menu

5.4.7



Export the log file of the machine:

• press start to begin the export

5.4.7a




Progress screen

- wait until the process is finished
- press on cancel to interrupt

5.4.7b







Information screens:

screen <u>5.4.7</u> is displayed after a few seconds

5.4.7c




5.4.8 Software update history

In this menu software history is shown.

The following software history are shown with item number, version, date and time:

- product software (HMI)
- I/O board software
- touch software
- WI-Fi/Bluetooth
- bus devices (if they are connected)

The update log can contain up to 50 items, the last update is shown first.



Information screens:

- press or to retrieve the update history
- press ☐ or ☐ to scroll through the software menu

5.4.8



5.5 Online info

Online information can be approached via the QR code shown on the screen. Select one of the available options

- press

 or
 to select the next option of the "machine menu"
- press the "text area" to select the next level for that menu
- press

 to go back to chapter 5. Programming menu on p.14



Online information:

- press "online info" to confirm
- press **<** or **>** to scroll through the machine menu

5.5.1



Online manuals:

- press **I** or **I** to scroll through the available QR codes
- scan the QR code to get the latest online manual(s)

5.5.1a



Online animations:

- press **<** or **>** to scroll through the available QR codes
- scan the QR code to get the latest online animation(s)

5.5.1b



6. Messages and errors

6.1 Warning messages

Warnings are used to inform you of a state which can prevent the Bolero from working correctly. In general warnings are shown after selecting a beverage.

- ▶ The messages/warnings are displayed for 30 seconds then return to the home screen.
 - » a message (Mxxx) is a positive confirmation of a user action.
 - » a warning (Wxxx) indicates a problem or potentially harmful condition



Example display for a warning. These notifications are stored in a log file (§5.4.3 on p.98).

6.1a

code	description	action			
W001	temperature sensor out of range	 no action required, disappears after a few seconds, becomes after 3 incidents E002 			
W002	temperature too high	• no action required, disappears after a few seconds			
W003	temperature not rising while relay engaged	• no action required, disappears after a few seconds, becomes E004 after 3 incidents within certain time			
W004	canister motor not detected	reset the message on the screen			
		» if the warning persists, contact your dealer			
W005	not used				
W006	mixing systems must be rinsed	reset the message on the screen			
		» rinse the mixing system, see §5.1.1 on p.16.			
W007	8				
	soon	» schedule the descaling procedure soon			
W008	machine must be descaled now	reset the message on the screen (the warning will pop-up after every dispensed beverage)			
		» descale the machine, see §5.1.2 on p.18)			



code	description	action		
W009	water filter must be	reset the message on the screen		
	changed soon	» schedule water filter replacement soon		
W010	water filter must be changed now	 reset the message on the screen (the warning will pop-up after every dispensed beverage) 		
		» replace the water filter and confirm in §5.1.3 Water filter management on p.26		
M011	payment device connection successful			
W012	payment device connection failed	• no action required, disappears after a few seconds		
		» check the connections and restart the payment device		
		» if the error persists, contact your dealer		
W013 - W019	not used			
W020	contact your dealer for preventive maintenance	• reset the message on the screen, the message will recur several times after which it becomes E026		



6.2 Errors

Error messages appear when an error is detected by the machines operating system. When the error is active and is cancelled by the user, the machine goes out of safe mode and tries to recover. If the error is not cleared by retrying, the error reappears.

▶ If the error message returned after the appropriate action, please contact your dealer.



Example display for errors. These errors are stored in a log file (§5.4.2 on p.97).

6.2a

code	description	action	
E001	temperature rise while relay disengaged	reset the message on the screen	
		» if the error persists, contact your dealer	
E002	temperature sensor out of range	reset the message on the screen	
		» if the error persists, contact your dealer	
E003	magnetic valve unexpectedly opened	reset the message on the screen	
		» if the error persists, contact your dealer	
E004	temperature not rising	reset the message on the screen	
	while relay engaged	» if the error persists, contact your dealer	
E005	not available		
E006	water supply failure	 reset the message on the screen, if the error repeats verify the following: 	
		» check that the water tap is open	
		» check that the water supply hose is not kinked	
		» check whether water comes out of the water tap	
		» if the error persists, contact your dealer	



code	description	action			
E007	not used				
E008	bus system communication	reset the message on the screen			
	error	» if the error persists, contact your dealer			
E009	pump motor malfunction	reset the message on the screen			
		» if the error persists, contact your dealer			
E010	mixer motor not detected	 reset the message on the screen, if the error repeats verify the following: 			
		» check that the mixing bowl is clean and not blocked			
		» if the error persists, contact your dealer			
E011	canister motor malfunction	reset the message on the screen, if the error repeats verify the following:			
		» remove the canister and try again			
		» remove the ingredient powder from the canister and try again			
		» if the error persists, contact your dealer			
	► E011 cannot be detected by the hardware when the canister motor is running at very low speed, i.e. when very small amounts of ingredients are dispensed, which is usually the case for recipes with a very low ingredient/water ratio.				
E012	coin mechanism missing	reset the message on the screen, if the error repeats verify the following:			
		» check whether the payment device is correctly connected			
		» if the error persists, contact your dealer			
E013	coin mechanism defective	 reset the message on the screen, if the error repeats verify the following: 			
		» check whether the payment device is correctly connected			
		» if the error persists, contact your dealer			
E014	coin mechanism blocked	 reset the message on the screen, if the error repeats verify the following: 			
		» check the payment device for any blockages			
		» if the error persists, contact your dealer			
E015	coin mechanism sabotaged	 reset the message on the screen, if the error repeats verify the following: 			
		» check the payment device for any damages			



code	description	action		
E016	coin mechanism communication error	 reset the message on the screen, if the error repeats verify the following: 		
		» check whether the payment device is correctly connected		
E017	coin mechanism general error	 reset the message on the screen, if the error repeats verify the following: 		
		» check whether the payment device is correctly connected		
E018	cashless device general error	 reset the message on the screen, if the error repeats verify the following: 		
» check whet connected		» check whether the payment device is correctly connected		
E019 - not used				
E026	contact your dealer for necessary maintenance (the error message on the screen, or dealer for required maintenance (the error message will occur more the previous warning message W0			



7. Appendix

7.1 Filter information and water hardness

	very soft	soft	average	moderate	hard
°dH	0 - 4	4 - 8	8 - 12	12 - 18	18 - 30
°fH/°TH	0 - 7	7 - 15	15 - 22	22 - 32	32 - 54
°e / Clark	0 - 5	5 - 10	10 - 15	15 - 23	23 - 38
mmol/l	0 - 0.72	0,72 - 1.43	1.43 - 2.15	2.15 - 3.22	3.22 - 5.37
descale	2000 I.	1500 l.	1000 l.	500 l.	250 l.

- ▶ The capacity of a water filter depends on the type and local hardness of the water.
- ► See $\S 5.1.6$ on p.32 to set the water hardness.

7.2 Door switch functionality





When the door opens the safety switch is activated and a message is shown.

The following hardware will become inactive:

- all mixers
- all canisters
- boiler
- appliances that are connected to the 24 V safety of the bus system
- When the door switch is activated during dosing of a beverage, the dosing is cancelled and the mixer cup is cleaned by a post flush.

7.3 Basic machine configurations








7.4 PIN code security settings

The table below lists the available menu options associated with the PIN codes. When a PIN code is *not* set, all menu items are available and the table must be ignored.

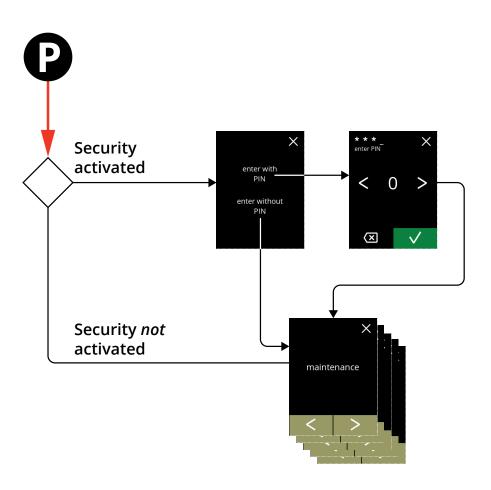

Section	Menu name	PIN 1	PIN 2	without PIN
5.	Programming menu	✓	✓	✓
5.1	Maintenance menu	✓	✓	✓
5.1.1	Rinse the mixing system	✓	✓	✓
5.1.2	Descale	✓	✓	✓
5.1.3	Water filter management	✓	✓	✓
5.1.4	Hot-key rinsing function	✓	✓	×
5.1.5	Cleaning management	✓	✓	×
5.1.6	Descale management	✓	✓	×
5.1.7	Canister calibration	✓	✓	×
5.1.8	Pump calibration	✓	×	×
5.1.9	Input test	✓	×	×
5.1.10	Output test	✓	×	×
5.1.11	Cleaning instructions	✓	✓	✓
5.1.12	Counters	✓	✓	✓
	reset day counters	✓	✓	✓
	reset all counters	✓	×	×



Section	Menu name	PIN 1	PIN 2	without PIN
5.2	Beverage menu	✓	✓	×
5.2.1	Add beverage to screen	✓	✓	×
5.2.2	Change beverage name	✓	✓	×
5.2.3	Change beverage price	✓	✓	×
5.2.4	Recipe editor	✓	✓	×
5.2.5	Select ingredients canisters	✓	✓	×
5.2.6	Change ingredient name	✓	✓	×
5.2.7	Set default volume	✓	✓	×
5.2.8	Set default strength	✓	✓	×
5.3	Machine menu	✓	✓	×
5.3.1	Year	✓	✓	×
5.3.2	Date	✓	✓	×
5.3.3	Time	✓	✓	×
5.3.4	Language	✓	✓	×
5.3.5	Screensaver management	✓	✓	×
5.3.6	Background	✓	✓	×
5.3.7	Display brightness	✓	✓	×
5.3.8	Sound level feedback	✓	✓	×
5.3.9	Boiler temperature	✓	✓	×
5.3.10	Energy-saving mode (ECO)	✓	✓	×
5.3.11	Security settings	✓	✓	×
5.3.12	Connected devices	✓	✓	×
5.3.13	Reset to factory settings	✓	×	×
5.4	Software menu	✓	✓	✓
5.4.1	Machine and software information	✓	✓	✓
5.4.2	Error log	✓	✓	×
5.4.3	Warning log	✓	✓	×
5.4.4	Import machine settings	✓	×	×
5.4.5	Export machine settings	✓	×	×
5.4.6	Update software	✓	×	×
5.4.7	Export machine log	✓	×	×
5.4.8	Software update history	✓	×	×
5.5	Online info	✓	✓	✓

[►] Menu items secured by PIN codes will be greyed out, see §5.3.11 on p.86 to set the PIN codes.



7.5 Special functions

By using a "secret key combination" special features can be activated.

7.5.1 Cancel beverage on/off

See §5.3.12 Connected devices on p.91

► Reason of this feature is that the customer can choose if the beverage can be cancelled or not when a payment system is connected.

7.5.2 Quick rinse



By pressing the S M L on the beverage selection screen for 5 seconds the quick rinse is immediately activated with 90 ml (hot water).

► To set this function, see §5.1.4 Hot-key rinsing function on p.29





